
## MEADOW ROLLERS

## Standard

- roller scraper with smooth adjustment
- support foot
- single-point hitch
- flood-drain plugs
- one- or two-piece roller
- water regulated weight
- varnish coating with improved parameteres

## MORS

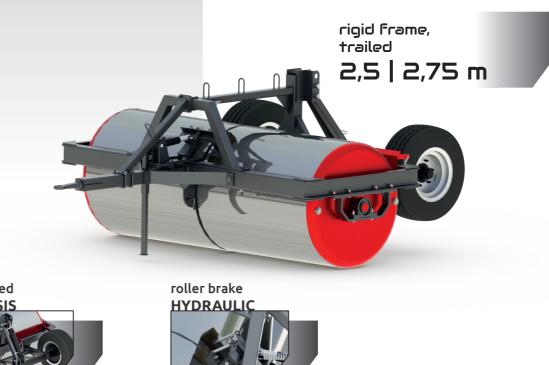

Options



unbraked





One- or two-piece meadow rollers, the weight of which is regulated by the amount of water filling the roller. The wall thickness of the machine is 12 mm and the diameter is 1016 or 1220 mm. Working width 2.5 or 2.75 m. Each roller can be equipped with a chassis with a braked or unbraked axle and individual hydraulic brakes. MORS has been used in the care of meadows and pastures, at football stadiums, golf courses in the establishment and production of lawns. During rolling, the top layer of the soil is pressed down and water infiltration increases, the development of beneficial soil microflora and the decomposition of organic matter is accelerated.

	SPECIFICATION	rigid frame, trailed							
$\longleftrightarrow$	Working width  m	2,5				2,75			
	Roller type and diameter  mm	one-piece	two-piece	one-piece	two-piece	one-piece	two-piece	one-piece	two-piece
		1016	1016	1220	1220	1016	1016	1220	1220
ID	Catalog number  id	3300	3304	3302	3306	3301	3305	3303	3307
<b>9</b> 4	Required power  HP	80-90	80-90	90-110	90-110	90-110	90-110	110-120	110-120
গ্রু	Weight  kg	1200	1250	1450	1520	1260	1320	1530	1600
	OPTIONS								

unbraked chassis

braked chassis

hydraulic brake for roller

LED lighting



## MORS